




in.temp

A new way to regulate the water of your spa

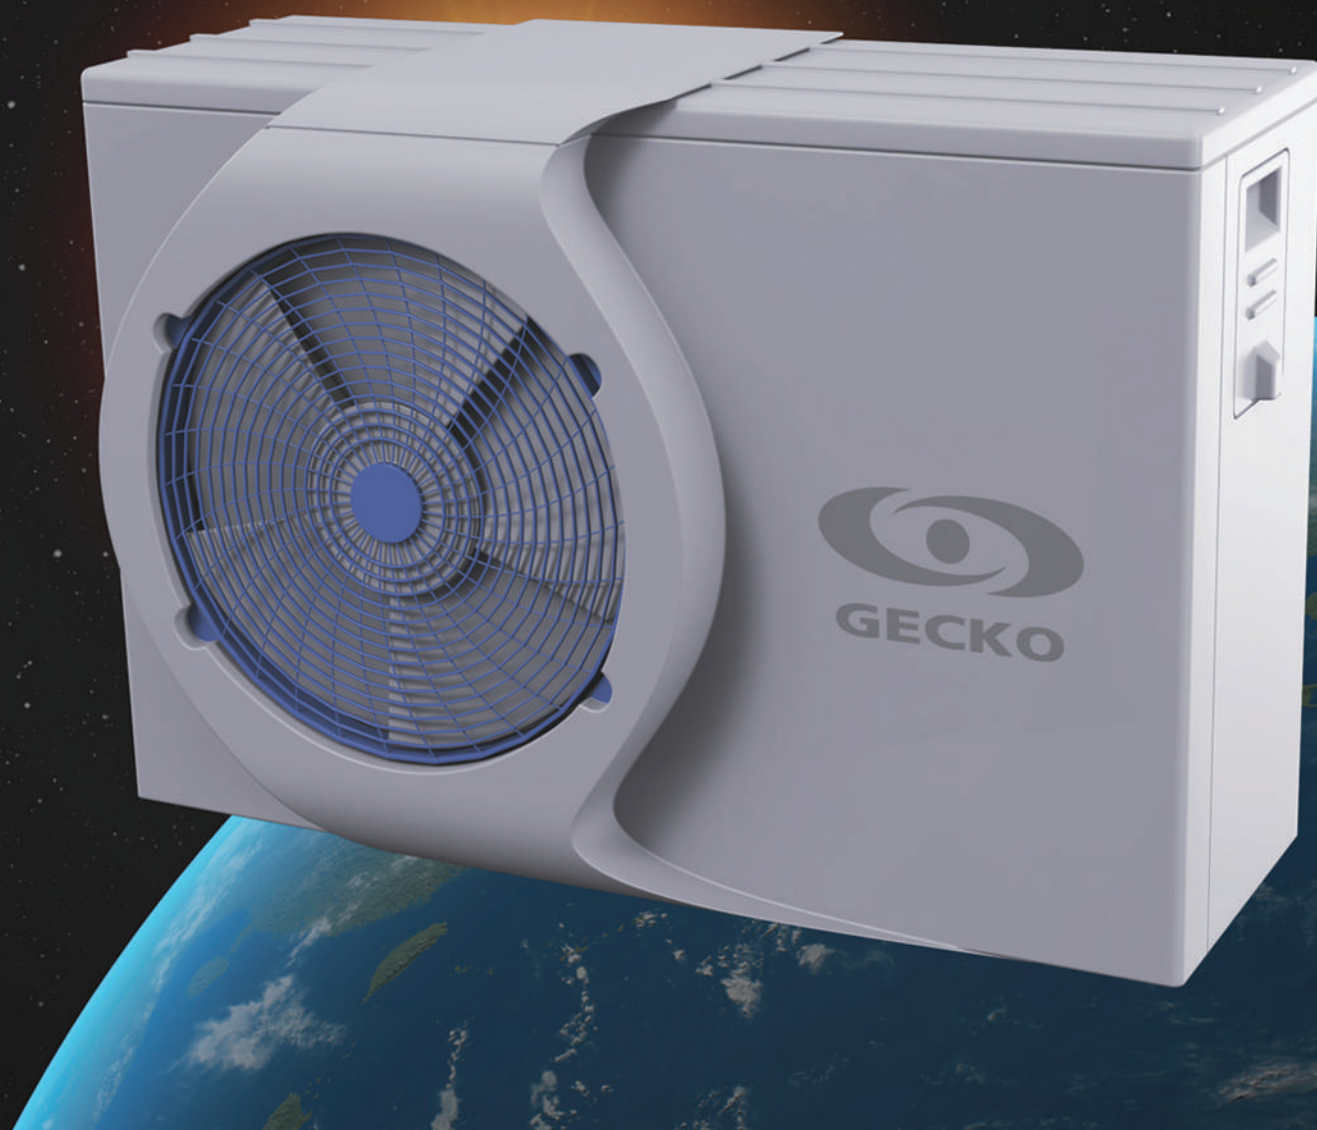

Plug and play solution

Here comes Gecko's new heat pump solution. Using our in.temp has never been so easy ! Simply connect it to a Y series control that supports it and you're good to go ! Automatic detection, smart power management and no additional power circuit required for in.temp powers directly from the spa control.

Benefit from energy savings

Are you looking for the most energy efficient form of heating water? Our in.temp is the perfect solution !


Air sourced heat pumps, will allow you to save up to 75% energy consumption in comparison with electric elements. The icing on the cake: Gecko's in.temp is also ecofriendly refrigerant (R32 and R410A).

A total flexibility thanks to its various modes

With in.temp, you can choose one of its six modes of operation that suits you the best, depending on your climate. Smart modes let you taking full advantage of your external heat sources to optimize your savings.



in.temp installation

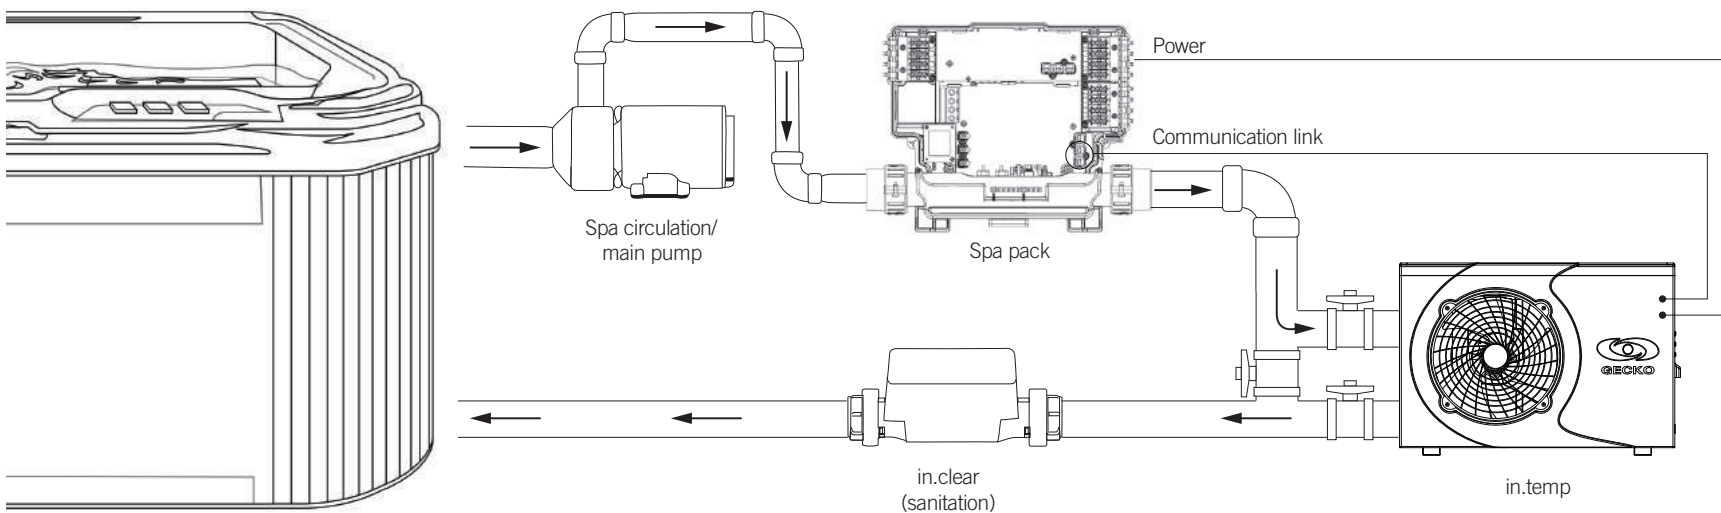

specifications

		Model	
		Gecko-5kW	Gecko-7.5kW
Condition	Ambient air 24°C (75°F),	Heating capacity (KW)	5.54
	Water 26°C (79°F) in,	Power input (KW)	0.89
	28°C (82°F) out	COP	6.21
	Ambient air 15°C (59°F),	Heating capacity (KW)	4.34
	Water 26°C (79°F) in,	Power input (KW)	0.88
	28°C (82°F) out	COP	4.91
Power supply	Ambient air 35°C (95°F),	Cooling capacity (KW)	3.87
	Water 29°C (84°F) in,	Power input (KW)	1.2
	27°C (81°F) out	EER	3.21
		V/Hz	220-240V / 50Hz
		Max power input (KW)	1.29
		Rate current (A)	3.94
		Max current (A)	6.07
		Water flow (M3/h)	2.35
		Compressor brand	GMCC (KSM-135V1VFT)
		Compressor type	Rotary
		Refrigerant	R32/R410A (NA)
		Min pressure/Max pressure	1.5/3.7Mpa
		Carton box sizes	850 x 390 x 572 mm
			33,5" x 15,4" x 22,5"
		Unit net dimensions	826 x 379 x 552 mm
			32,5" x 14,9" x 21,7"
		Net weight (kg)	44
		Gross weight (kg)	57
		Noise	27db(A)
		Water proof level	IPX4

dimensions

		Gecko-5kW	Gecko-7.5kW
	A	555 mm (21.85")	661 mm (26.02")
	B	794 mm (31.26")	902 mm (35.51")
	C	395 mm (15.55")	423 mm (16.65")
	D	346 mm (13.62")	356 mm (14.02")
	E	92 mm (3.62")	141 mm (5.55")
	F	610 mm (24.02")	620 mm (24.41")
	G	260 mm (10.24")	370 mm (14.57")
	H	96 mm (3.78")	96 mm (3.78")

Compatibility

in.temp works with the following systems from Gecko's Y series



Wide selection of keypads
(auto-detected by the system upon connection)



in.k330 main keypad
Color LCD display, 5 keys



in.k500 main keypad
color LCD display, 7 keys



in.k800 main keypad
color LCD display, 10 keys



in.k1001 main keypad
color LCD capacitive
touchscreen display



in.k1000 main keypad
color LCD capacitive
touchscreen display